

GEMINI DUETTE BLACKOUT F.R. DUETTE



TESSUTI PER
TENDE PLISSÉ

FABRICS FOR
PLEATED BLINDS

TEJIDOS PARA
CORTINAS PISADAS

TECIDOS PARA
ESTORES PLISSADOS

TISSUS POUR
STORES PLISSÉS

STOFFE FÜR PLISSEE

STOFFEN VOOR PLISSÉ

ТКАНИ ДЛЯ
ПЛИССИРОВАННЫХ
ШТОР



PL TECHNICAL
FABRICS




tecnologia e creatività

www.mottura.com



IGNIFUGO
FLAME RETARDANT
IGNIFUGO
IGNIFUGO
FEUERHEMMENDE
BRANDWERENDE
ОГНЕУСТОЙЧИЙ



COMPOSIZIONE
COMPOSITION
COMPOSICION
COMPOSITION
ZUSAMMENSETZUNG
SAMENSTELLUNG
COCTAB



PESO
WEIGHT
PESO
POIDS
GEWICHT
GEWICHT
BEC



SOLIDITÀ ALLA LUCE
LIGHTFASTNESS
SOLIDEZ À LA LUZ
SOLIDITÉ À LA LUMIÈRE
LICHTECHTHEIT
LICHTECHTHEID
СВЕТОУСТОЙЧИВОСТЬ



TRASMISSIONE SOLARE
SOLAR TRANSMITTANCE
TRANSMISION SOLAR
PROPAGACÃO DE ENERGIA SOLAR
TRANSMISSION SOLAIRE
SOLARTRANSMISSION
LICHTTRANSMISSIE
ПРОПУСКАНИЕ СОЛНЕЧНЫХ ЛУЧЕЙ



RIFLESSIONE SOLARE
SOLAR REFLECTANCE
REFLEXION SOLAR
REFLEXÃO DE ENERGIA SOLAR
REFLEXION SOLAIRE
SOLARREFLEXION
LICHTREFLECTIE
ОТРАЖЕНИЕ СОЛНЕЧНЫХ ЛУЧЕЙ



ASSORBIMENTO SOLARE
SOLAR ABSORPTANCE
ABSORCION SOLAR
ABSORÇÃO DE ENERGIA SOLAR
ABSORPTION SOLAIRE
SOLARABSORPTION
LICHTABSORPTIE
ПОГЛОЩЕНИЕ СОЛНЕЧНОГО СВЕТА



TRASMISSIONE LUCE VISIBILE
VISIBLE TRANSMITTANCE
TRANSMISION LUZ VISIBILE
PROPAGACÃO DE LUMINOSIDADE
TRANSMISSION LUMIERE VISIBILE
LICHTTRANSMISSION
ZICHTBAAR LICHTTRANSMISSIE
ПРОПУСКАНИЕ СОЛНЕЧНОГО СВЕТА



G FACTOR
G FACTOR
G FACTOR
G FACTOR
G-FAKTOR
G FACTOR
ФАКТОР G



ABBATTIMENTO UV
UV SCREEN
PROTECCIÓN UV
RETEÇÃO DE RAIOS UV
ABATEMENT UV
UV-FILTERUNG
UV BESCHERMING
ФИЛЬТР УЛЬТРАФИОЛЕТОВЫХ ЛУЧЕЙ



SALDABILITÀ
SEALABILITY
SOLDABILIDAD
SOLDABILIDADE
CARAC. DE Soudure
SCHWEISSBARKEIT
KARAK. VOOR HET LASSEN
СКЛЕЙКА ТКАНИ




MANUTENZIONE
MAINTENANCE
MANUTENÇÃO
ENTRETIEN
PFLEGE
ONDERHOUD
УХОД

GEMINI - DUETTE BLACKOUT F.R. - DUETTE

Gemini		Duette Blackout F.R.		Duette	
—		CLASSE 1 (I) B1 (D)		-	
100% PL		100% PL		100% PL	
125 g/m²		230 g/m²		160 g/m²	
5/6 (ISO105 B02)		6/7 (ISO105 B02)		6/7 (ISO105 B02)	
0%		0% (EN 14501)		17%5% (EN 14501)	
70%		72% (EN 14501)		47%30% (EN 14501)	
30%		28% (EN 14501)		36%65% (EN 14501)	
0%		0% (EN 14501)		16%3% (EN 14501)	
—		0,30 (EN 13363-1)		0,460,54 (EN 13363-1)	
98%		100%		94%97%	
NON SALDABILE NOT SEALABLE NO SOLDABLE NÃO SOLDÁVEL	NON SOUDABLE NICHT SCHWEISSBAR NIET LASBAAR СКЛЕЙКА НЕВОЗМОЖНА	NON SALDABILE NOT SEALABLE NO SOLDABLE NÃO SOLDÁVEL	NON SOUDABLE NICHT SCHWEISSBAR NIET LASBAAR СКЛЕЙКА НЕВОЗМОЖНА	NON SALDABILE NOT SEALABLE NO SOLDABLE NÃO SOLDÁVEL	NON SOUDABLE NICHT SCHWEISSBAR NIET LASBAAR СКЛЕЙКА НЕВОЗМОЖНА
NON UTILIZZARE ACQUA; INTERVENIRE A SECCO PER RIMUOVERE DEPOSITI DI POLVERE - DO NOT USE WATER; CLEAN DRY TO REMOVE DUST DEPOSITS NO USAR AGUA; INTERVENIR EN SECO PARA QUITAR DEPÓSITOS DE POLVO - NÃO UTILIZAR ÁGUA; AGIR A SECO PARA REMOVER DEPÓSITOS DE PÓ NE PAS UTILISER D'EAU. NETTOYER À SEC POUR SUPPRIMER LES DÉPÔTS DE POUSSIÈRE KEIN WASSER VERWENDEN; STAUBABLAGERUNGEN TROCKEN ENTFERNEN GEEN WATER GEBRUIKEN. DROOGKUIS VOOR HET VERWIJDEREN VAN STOF - НЕ ИСПОЛЬЗОВАТЬ ВОДУ; СУХАЯ ЧИСТКА ДЛЯ УДАЛЕНИЯ ПЫЛИ					

PL: POLIESTERE
POLYESTER
POLIESTER
POLIESTER
POLIESTER
POLYESTER
ПОЛИЭСТЕР

COLORI CHIARI
LIGHT COLORS
COLORES CLAROS
CORES CLARAS
COULEURS CLAIRES
HELLE FARBEN
LICHTE KLEUREN
СВЕТЛЫЕ ЦВЕТА




COLORI SCURI
DARK COLORS
COLORES OSCUROS
CORES ESCURAS
COULEURS FONCÉES
DUNKLE FARBEN
DONKERE KLEUREN
ТЕМНЫЕ ЦВЕТА




Z536/25 ediz. 06/12

GEMINI

300 cm ↔



20 mm

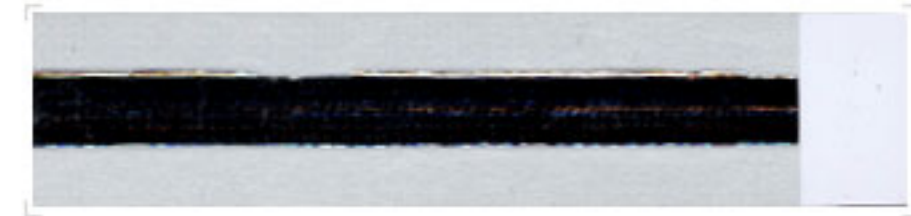

3768/01



3768/02



3768/03



3768/04




3768/05

DUETTE BLACKOUT F.R.

225 cm ↔



25 mm

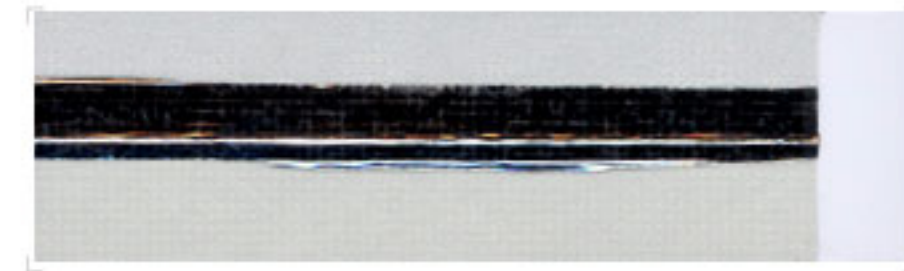

3770/01



3770/02



3770/03



3770/04



3770/05

DUETTE

225 cm ↔



25 mm



3772/01




3772/02



3772/03



3772/04

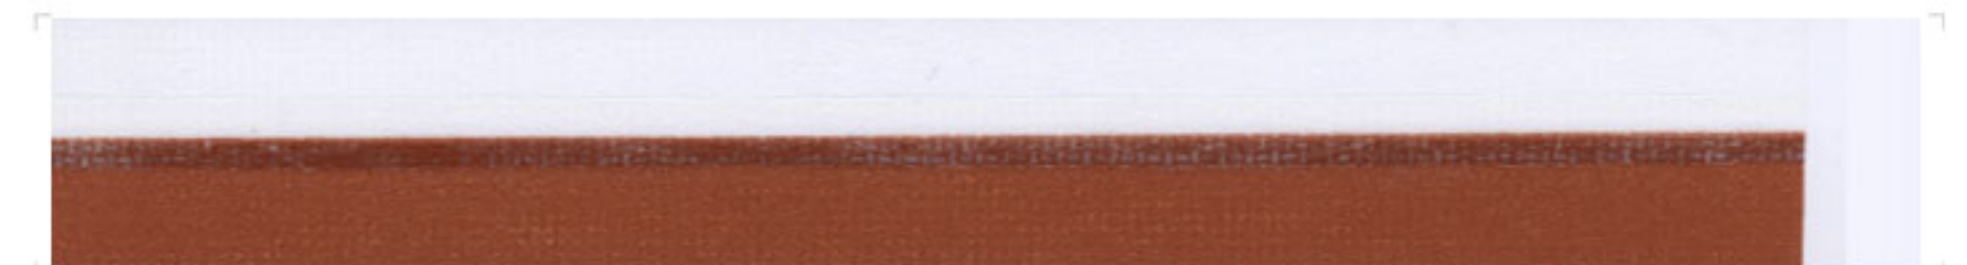


3772/05



3772/06



3772/07

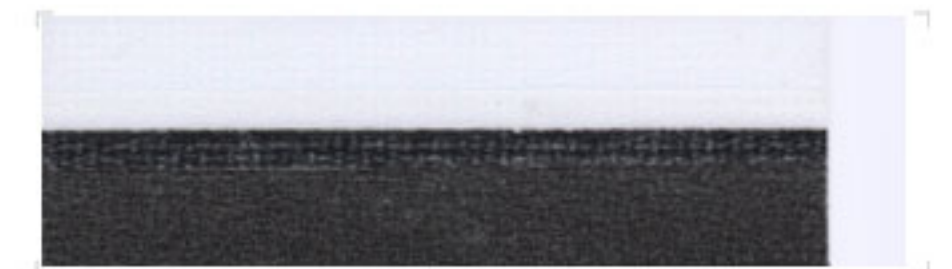

3772/08



3772/09