


SCREEN G3

250 cm ↔

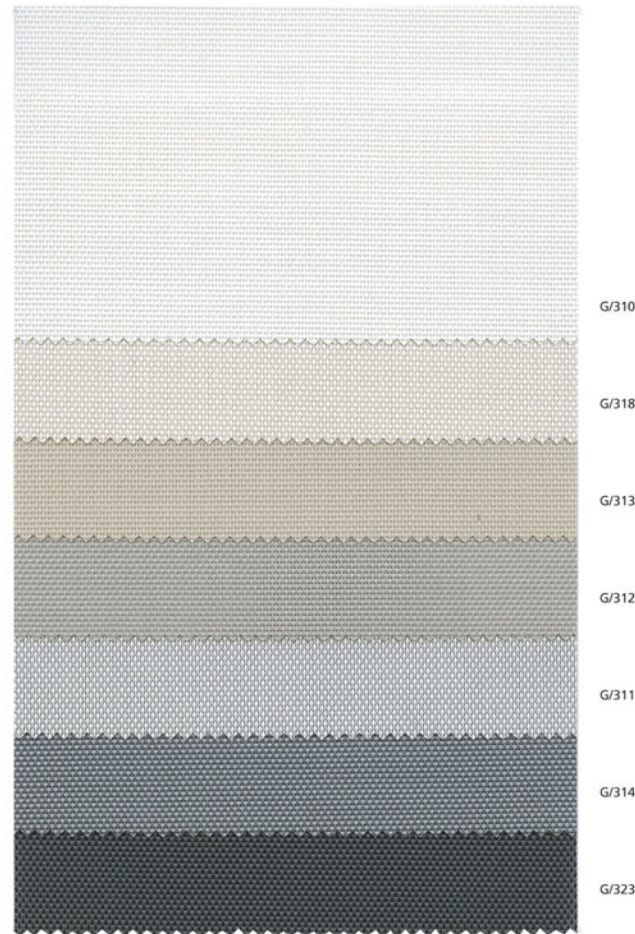


SCREEN G4

250 cm ↔



SCREEN G4V

127 mm

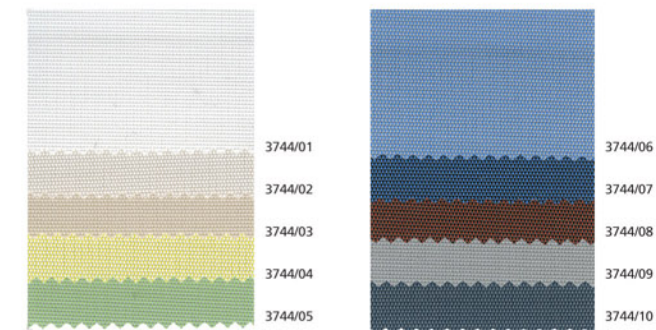

SCREEN G5

250 cm ↔





G SCREEN F.R. A



TESSUTI SCREEN
IGNIFUGHI

FLAME RETARDANT
SCREEN FABRICS

TEJIDOS SCREEN
IGNIFUGOS

TECIDOS SCREEN
IGNIFUGOS

TISSUS SCREEN
NON-FEU

FEUERHEMMENDE
SCREEN STOFFE

BRANDWERENDE
SCREEN STOFFEN

ОГНЕСТОЙКИЕ
ТКАНИ СКРЕЕН



TECHNICAL
FABRICS



www.mottura.com

MOTTURA
tecnologia e creatività

G SCREEN F.R. A

G3	G4	G4V	G5
CLASSE 1 (I) M1 (F) B1 (D)	CLASSE 1 (I) M1 (F) B1 (D)	CLASSE 1 (I) M1 (F) B1 (D)	CLASSE 1 (I) M1 (F) B1 (D)
36% FV 64% PVC	36% FV 64% PVC	36% FV 64% PVC	35% FV 65% PVC
350 g/m ² (ISO 2286-2)	410 g/m ² (ISO 2286-2)	430 g/m ² (ISO 2286-2)	450 g/m ² (ISO 2286-2)
0,55 mm (ISO 2286-3)	0,55 mm (ISO 2286-3)	0,55 mm (ISO 2286-3)	0,60 mm (ISO 2286-3)
10%	5%	3%	3%
7/8 (ISO 105 B02)	7/8 (ISO 105 B02)	7/8 (ISO 105 B02)	7/8 (ISO 105 B02)
27% (EN 14501)	21% (EN 14501)	20% (EN 14501)	18% (EN 14501)
63% (EN 14501)	68% (EN 14501)	68% (EN 14501)	64% (EN 14501)
10% (EN 14501)	11% (EN 14501)	12% (EN 14501)	18% (EN 14501)
26% (EN 14501)	15% (EN 14501)	19% (EN 14501)	11% (EN 14501)
0,27 (EN 13363-1)	0,24 (EN 13363-1)	0,24 (EN 13363-1)	0,35 (EN 13363-1)
90%	96%	98%	98%
190 daN/5 cm (ISO 1421)	150 daN/5 cm (ISO 1421)	150 daN/5 cm (ISO 1421)	200 daN/5 cm (ISO 1421)
100 daN/5 cm (ISO 1421)	150 daN/5 cm (ISO 1421)	150 daN/5 cm (ISO 1421)	200 daN/5 cm (ISO 1421)
SALDABILE A CALDO HEAT SEALABLE A SUDAR EN CALIENTE SOLDABLE A QUINTE FORNAR CUCINERA	SALDABILE A CALDO HEAT SEALABLE A SUDAR EN CALIENTE SOLDABLE A QUINTE FORNAR CUCINERA	SALDABILE A CALDO HEAT SEALABLE A SUDAR EN CALIENTE SOLDABLE A QUINTE FORNAR CUCINERA	SALDABILE A CALDO HEAT SEALABLE A SUDAR EN CALIENTE SOLDABLE A QUINTE FORNAR CUCINERA
PLUTURA CON SPONZA LEGGERMENTE UMIDA - LIMPRESA CON SPONZA LIGERAMENTE HUMEDA NETTOYAGE AVEC SPONGE LEGEREMENT HUMIDE - NETTOYAGE AVEC SPONGE LIGEREMENT HUMIDE BESPAAR MET LICHT BESCHUDDIGEN - REINIGEN MET LICHT VLECHTEN SCHUWARM	PLUTURA CON SPONZA LEGGERMENTE UMIDA - LIMPRESA CON SPONZA LIGERAMENTE HUMEDA NETTOYAGE AVEC SPONGE LEGEREMENT HUMIDE - NETTOYAGE AVEC SPONGE LIGEREMENT HUMIDE BESPAAR MET LICHT BESCHUDDIGEN - REINIGEN MET LICHT VLECHTEN SCHUWARM	PLUTURA CON SPONZA LEGGERMENTE UMIDA - LIMPRESA CON SPONZA LIGERAMENTE HUMEDA NETTOYAGE AVEC SPONGE LEGEREMENT HUMIDE - NETTOYAGE AVEC SPONGE LIGEREMENT HUMIDE BESPAAR MET LICHT BESCHUDDIGEN - REINIGEN MET LICHT VLECHTEN SCHUWARM	PLUTURA CON SPONZA LEGGERMENTE UMIDA - LIMPRESA CON SPONZA LIGERAMENTE HUMEDA NETTOYAGE AVEC SPONGE LEGEREMENT HUMIDE - NETTOYAGE AVEC SPONGE LIGEREMENT HUMIDE BESPAAR MET LICHT BESCHUDDIGEN - REINIGEN MET LICHT VLECHTEN SCHUWARM
FV: FIBRA DI VETRO FIBRA DE VIDRO FIBRE DE VERRE GLASSEER СТЕКЛОСЛОИ	PVC: POLIETILENE POLIETILENE POLYETHYLENE POLYETHYLENE ПОЛИЭТИЛЕН	COLORE CHIARI LIGHT COLORS COLORES CLAROS COULEURS CLAIRES POLYETHYLENE POLYETHYLENE ПОЛИЭТИЛЕН	COLORE CHIARI LIGHT COLORS COLORES CLAROS COULEURS CLAIRES POLYETHYLENE POLYETHYLENE ПОЛИЭТИЛЕН

MOTTURA

Z 5316/16 ed. 01/12